

TC-H356Q Spec:30X/IW/A

H.265 5MP 30x Starlight AEW IR PTZ


Tiandy



Features

- Autotracking Early Warning(AEW)
- IR LED+White Light+Green Laser
- Starlight Ultra Low Light 0.002Lux
- S+265/H.265/H.264 HP/MP/BP/M-JPEG Codec
- Up to 2592×1944@30fps
- Mechanical WDR 140dB
- Smart IR, IR Range: 400m
- Min. Illumination Color: 0.002 Lux,B/W: 0.001 Lux, 0 Lux with IR
- NIR, WDR, 3D DNR, HLC, Dual-ICR, AWB, AGC, BLC
- VCA Tripwire/Double Tripwire/Perimeter/Object Abandon/Object
- Lost/Running/Loitering/Parking/Early Warning/Crowd/Audio
- Abnormal Detection/Video Abnormal Detection/Face
- Detection/People Counting/On duty Detection/Auto tracking
- Optical Zoom: 30x, Digital Zoom: 16x
- Speed Max 400°/s, -16~90° Tilt Angle
- Interface Built-in Speaker,Audio in/out 1/1,Alarm in/out
- 8/2,MicroSD Card Slot, up to 128GB, Reset Button,RS-485,BNC
- TVS 6000V, Lightning/Surge 4000V Protection, IP66
- Operating Conditions -40°C-70°C, 0~95% RHG

Dimensions

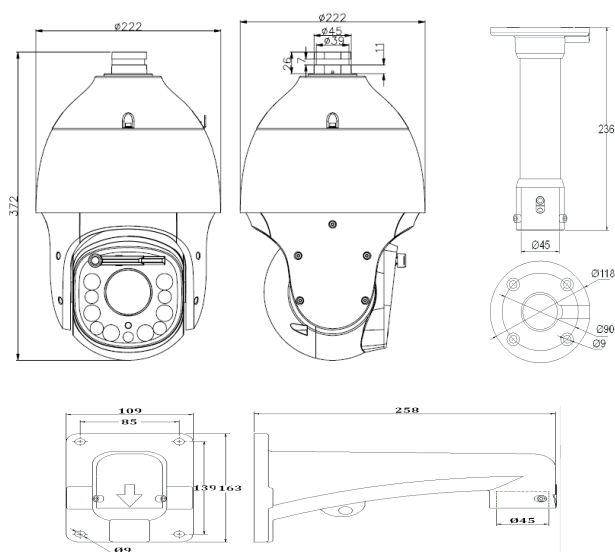

Camera	
Image Sensor	1/2.8" CMOS
Signal System	PAL/NTSC
Minimum Illumination	Color: 0.002 Lux @(F1.6,AGC ON)
	B/W:0.001Lux @(F1.6,AGC ON) 0 Lux with IR
White Balance	Auto/ ATW/ Manual
BLC	Y
HLC	Y
Smart Defog	Y
WDR	140dB
Digital Noise Reduction	3D DNR
Exposure Mode	Auto/ Manual/Iris First/ Shutter First
Shutter Time	1/1s~1/10000s
Day& Night	IR Cut Filter with Auto Switch
Optical Zoom	30x
Digital Zoom	16x
Privacy Masking	24 Privacy Mask Programmable; Optional Multiple Colors
Auto Focus	Auto/ Semi-automatic/ Manual
OSD	Size:16×16, 32×32, 24×24, 48×48, 64×64,96×96 Letters, Week, Date, Time, Total 5 Regions ,PTZ Angle Superposition
Lens	
Focal Length	4.7-141mm, 30x
Zoom Speed	Approx. 5s(Optical Wide-Tele)
Angle of View	69.5°(w)~2.7°(t)
Minimum Working Distance	1-1.5m(Wide-Tele)
Aperture Range	F1.5 ~ F4.0
Pan & Tilt	
Pan Range	360°endless
Pan Speed	Pan Manual Speed: 0.1° -240°/s
	Pan Preset Speed: 240°/s stepless
Preset Accuracy	±0.2°
Tilt Range	-16°-90° (Auto Flip)
Tilt Speed	Tilt Manual Speed: 0.1°-240°/s
	Tilt Preset Speed: 240°/s
3D Position	Y
Number of Preset	500
Scan	8
Cruise	8, up to 32 Presets per Cruise
Pattern	8, Each One With 600s Memory or 300 Orders
Power loss recovery	Y
Guard Action	Preset/ Cruise/ Pattern/ Scan
PTZ Position Display	Y
Freeze Frame	Y
RS-485 Protocols	PTZ_PELCO_D, PTZ_PELCO_P, PTZ_TC615_P, DOME_PELCO_D, DOME_PELCO_P, DOME_PLUS
Infrared	
IR Irradiation Distance	400m
IR Irradiation Angle	Adjustable by Zoom
Interface	
Audio Input	1-ch Line in Interface Line Input 2-2.4V[p-p]; Output Impedance 1KΩ, ±10%
Audio Output	1-ch, Line level, Impedance: 600Ω, Built-in speaker optional
Ethernet	1-ch RJ45 10M/ 100M
Alarm Input	8-ch
Alarm Output	2-ch
On-board Storage	MicroSD Card Slot, up to 128GB
BNC	1.0Vp-p / 75Ω, NTSC (or PAL) Composite
RS-485	Y
RESET	Y
Extension	N/A
Network	
Max.Image Resolution	5MP(2592×1944)
Main Stream	2592×1944@25/30fps; 2560×1920@25/30fps; 2560×1520@25/30fps; 2560×1440@25/30fps; 2048×1536@25/30fps; 1920×1080@25/30fps; 1920×1080@50/60fps; 1280×960@25/30fps; 1280×960@50/60fps; 1280×720@25/30fps; 1280×720@50/60fps
	704×576@25/30fps; 704×480@25/30fps; 704×288@25/30fps; 704×240@25/30fps; 352×240@25/30fps; 352×288@25/30fps;
	1920×1080@25/30fps; 1280×960@25/30fps; 1280×720@25/30fps; 704×576@25/30fps; 704×480@25/30fps; 640×480@25/30fps; 352×240@25/30fps; 352×288@25/30fps;
	1920×1080@25/30fps; 1280×960@25/30fps; 1280×720@25/30fps; 704×576@25/30fps; 704×480@25/30fps; 640×480@25/30fps; 352×240@25/30fps; 352×288@25/30fps;
Image Compression	S+265/H.265/H.264 High Profile/MJPEG
ROI Encoding	7 Dynamic Areas for Both Main and Sub Stream
Audio Compression	G711A/G711U/ADPCM/AAC
Protocols	TCP/UDP/HTTP/MULTICAST/UPnP/DHCP/PPPoE/DDNS/NFS/FTP/NTP/RTP/RTSP/IPV6/SNMP/SMTP
Remote Connection	10 Users Access at the Same Time
IP Address	Support static, dynamic IP address, Customized MTU , Customized Network card
System Compatibility	ONVIF (Profile S), SDK,P2P

CE FC RoHS

Tiandy Digital Technology Co., Ltd. | www.tiandy.com
 Perpa Tic. Merk. B Blok 8.Kat No:902-903-904 Şişli/İSTANBUL
 Tel: +90(212)222 71 66 Email: satis@cenova.comtr



TC-H356Q Spec:30X/IW/A

H.265 5MP 30x Starlight AEW IR PTZ

Tiandy

Dimensions(Optional)

Model: DF20



DF21



Advance

Autotracking Early Warning(AEW)	Keep tracking the target that activates alarming, and enable the speaker to warn, even open the green laser for frightening
Video Analytics(IVA)	Tripwire/Double Tripwire/Perimeter/Object Abandon/Object Lost/Running/Loitering/Parking/Early Warning/Crowd/Audio Abnormal Detection/Video Abnormal Detection/Face Detection/People Counting/On duty Detection/Auto tracking/Parking Detection/Safety Helmet Detection
Smart-tracking	By Manual/ Panorama/Tripwire/ Perimeter/Early warning trigger
Intelligent Alarm	Harsh Voice Alarm, Motion Detection, Mask Alarm, Port Alarm,Network Disable Alarm, IP Conflict, MAC Conflict Detection

General

Language	English,Spanish,Korean,Italian,Turkish,Thai,Russian,Traditional Chinese,Simplified Chinese,Polish,French
Operating Conditions	-40°C-70°C, 0~95% RHG
Power Supply	AC24V 3A
Power Consumption	38.6W MAX
Circuit Protection	TVS 6000V, Lightning/ Surge 4000V Protection
Impact Protection	IP66
IR LEDs	8pcs
White LEDES	2pcs
Wiper	Y
Dimensions	372mmx222mmx222mm
Weight	5.3KG (IP PTZ Only), 8KG (with Packing Box)

* Cenova BT ürün ve ürün özelliklerinde değişiklik yapma hakkını saklı tutar.
En güncel veriler için firmamıza başvurun.

