

TC-NC252S

2MP Starlight Vandalproof Mini IR Dome Camera


Tiandy



Features

- Starlight Ultra Low Light 0.002lux
- Up To 1080P, 1920x1080@30fps
- Cable Free Design
- H.265 Compression
- IE, Chrome, Firefox, Safari, Plug-in Free
- Mechanical WDR 140dB
- Smart IR, IR Range: 30m
- VCA Tripwire/Double Tripwire/Perimeter/Object Abandon/Object Lost/Running/Loitering/Parking/Crowd/Audio Abnormal Detection/Video Abnormal Detection
- Interface Built-in Mic, Audio I/O 1/0, MicroSD Card Slot, up to 128GB, Reset Button
- TVS 6000V, Lightning/Surge Protection: (Power 2000V, RJ45 1000V), IP66, IK10
- Operating Conditions -35 °C ~ 60 °C (IR OFF) / -35 °C ~ 40 °C (IR ON), 0 ~ 95% RHG
- Case Material Metal
- CE, FCC

Dimensions

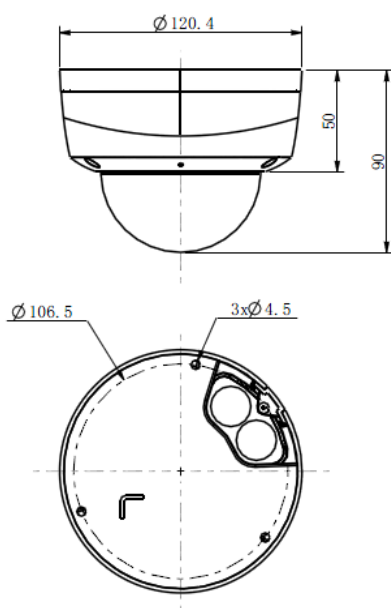

| Camera | |
|-------------------------|--|
| Image Sensor | 1/2.8" CMOS |
| Signal System | PAL/NTSC |
| Min. Illumination | Color: 0.002 Lux B/W: 0.001Lux |
| Shutter Time | 1s to 1/100,000s |
| Lens | 2.8mm, Angle of View: 95.2° |
| Lens Mount | M12 |
| Day& Night | IR Cut Filter with Auto Switch |
| Wide Dynamic Range | 140dB |
| Digital Noise Reduction | 3D DNR |
| Compression Standard | |
| Video Compression | H.265、H.264 HP/MP/BP、M-JPEG |
| Video Bit Rate | 32K~16Mbps |
| Audio Compression | G.711A/G.711U/ADPCM/AAC |
| Audio Bit Rate | 8K~48Kbps |
| Image | |
| Max. Image Resolution | 1920x1080 |
| Frame Rate | PAL: 25fps (1920 x 1080), 25fps (1280 x 720) NTSC: 30fps (1920 x 1080), 30fps (1280 x 720) |
| Mainstream | 1080P(1920*1080) |
| Substream | 4CIF (704*576) |
| 3rd Stream | 720p (1280*720) |
| Image Settings | Brightness, Saturation, Contrast, Flip Mode Adjustable by Client Software or Web Browser |
| HLC | Y |
| Smart Defog | Y |
| Corridor Format | Y |
| ROI | Y |
| Privacy Mask | Y |
| Picture Overlay | Y |
| OSD | 16x16, 32x32, 24x24, 48x48, 64x64, 96x96 Size Letters Such as Week, Date, Time, Total 5 Regions |
| Network | |
| Network Storage | FTP |
| NTP | Y |
| ANR | Y |
| Video Analytics | Tripwire/Double Tripwire/Perimeter/Object Abandon/Object Lost/Running/Loitering/Parking/Crowd/Video Abnormal Detection |
| EW | N/A |
| Alarm Trigger | Motion Detection/IP Conflict/MAC Conflict/Mask Alarm |
| Protocols | IPv4/IPv6/HTTP/802.1x/FTP/SMTp/UPnP/SNMP/DNS/DDNS/NTP/RTSP/TCP/UDP/DHCP/PPPoE |
| Remote Connection | ≤7 |
| System Compatibility | ONVIF (Profile S) , P2P, SDK, CGI |
| Interface | |
| Audio Input | 1-ch, Mic in |
| Audio Output | N/A |
| Communication Interface | 1-ch RJ45 10M / 100M Ethernet Interface |
| Alarm Input | N/A |
| Alarm Output | N/A |
| Video Output | N/A |
| On-board Storage | MicroSD Card Slot, up to 128GB |
| Extension | Reset |
| General | |
| Language | English, Simplified Chinese, Traditional Chinese, Spanish, Italian, Korean, Turkish, Russian, Thai, Polish, French |
| Operating Conditions | -35°C ~ 60°C, 0 ~ 95% RHG |
| Power Supply | DC 12 V ± 25%, POE |
| Power Consumption | Max. 5W (IR OFF) (ICR Instant Switch 8.5W) |
| IR Light | 8 |
| IR Distance | 30m |
| White Light | N/A |
| Impact Protection | IP66, IK10 |
| Dimensions | 120mm x 120mm x 90mm |
| Weight | 0.7KG (IP Camera Only); 0.9KG (with Packing Box) |

* The latest product information / specification can be found at <http://en.tiandy.com/>



Tiandy Technologies Co., Ltd | en.tiandy.com

Add: No.8, Huake Rd2, Binhai Hi-Tech Industry(Huayuan), Tianjin 300384 China

Tel: +86-22-58596037 Email: sales@tiandy.com

